

KAWASAKI STEEL TECHNICAL REPORT

No.19 (November 1988)

Steel Pipe

Construction and Operation of Dry Type Dust-Removal Equipment
for Blast Furnace

Kunihiro Tanaka, Toshiyuki Matsumoto, Teruo Kanetsuna, Katsunori Yoshida,
Hideyuki Kamano, Yunosuke Maki

Synopsis :

Dry type dust-removal equipment was installed at Chiba No.6 blast furnace in September 1986, and has been smoothly operating since the start of its operation. The dust-removal equipment uses a bag filter, which is under stable, continuous operation through the use of a unique and highly accurate temperature control system of water spraying. As a result of installing the dry type dust-removal equipment, generating electrical power by the top pressure recovery turbine increased by 4.5 kWh/t (about 11%) and the running cost of the BF gas heater and others has been reduced.

(c)JFE Steel Corporation, 2003

The body can be viewed from the next page.


Construction and Operation of Dry Type Dust-Removal Equipment for Blast Furnace*



Synopsis:

Dry type dust-removal equipment was installed at Chiba No. 6 blast furnace in September 1986, and has been smoothly operating since the start of its operation.

The dust-removal equipment uses a bag filter which is

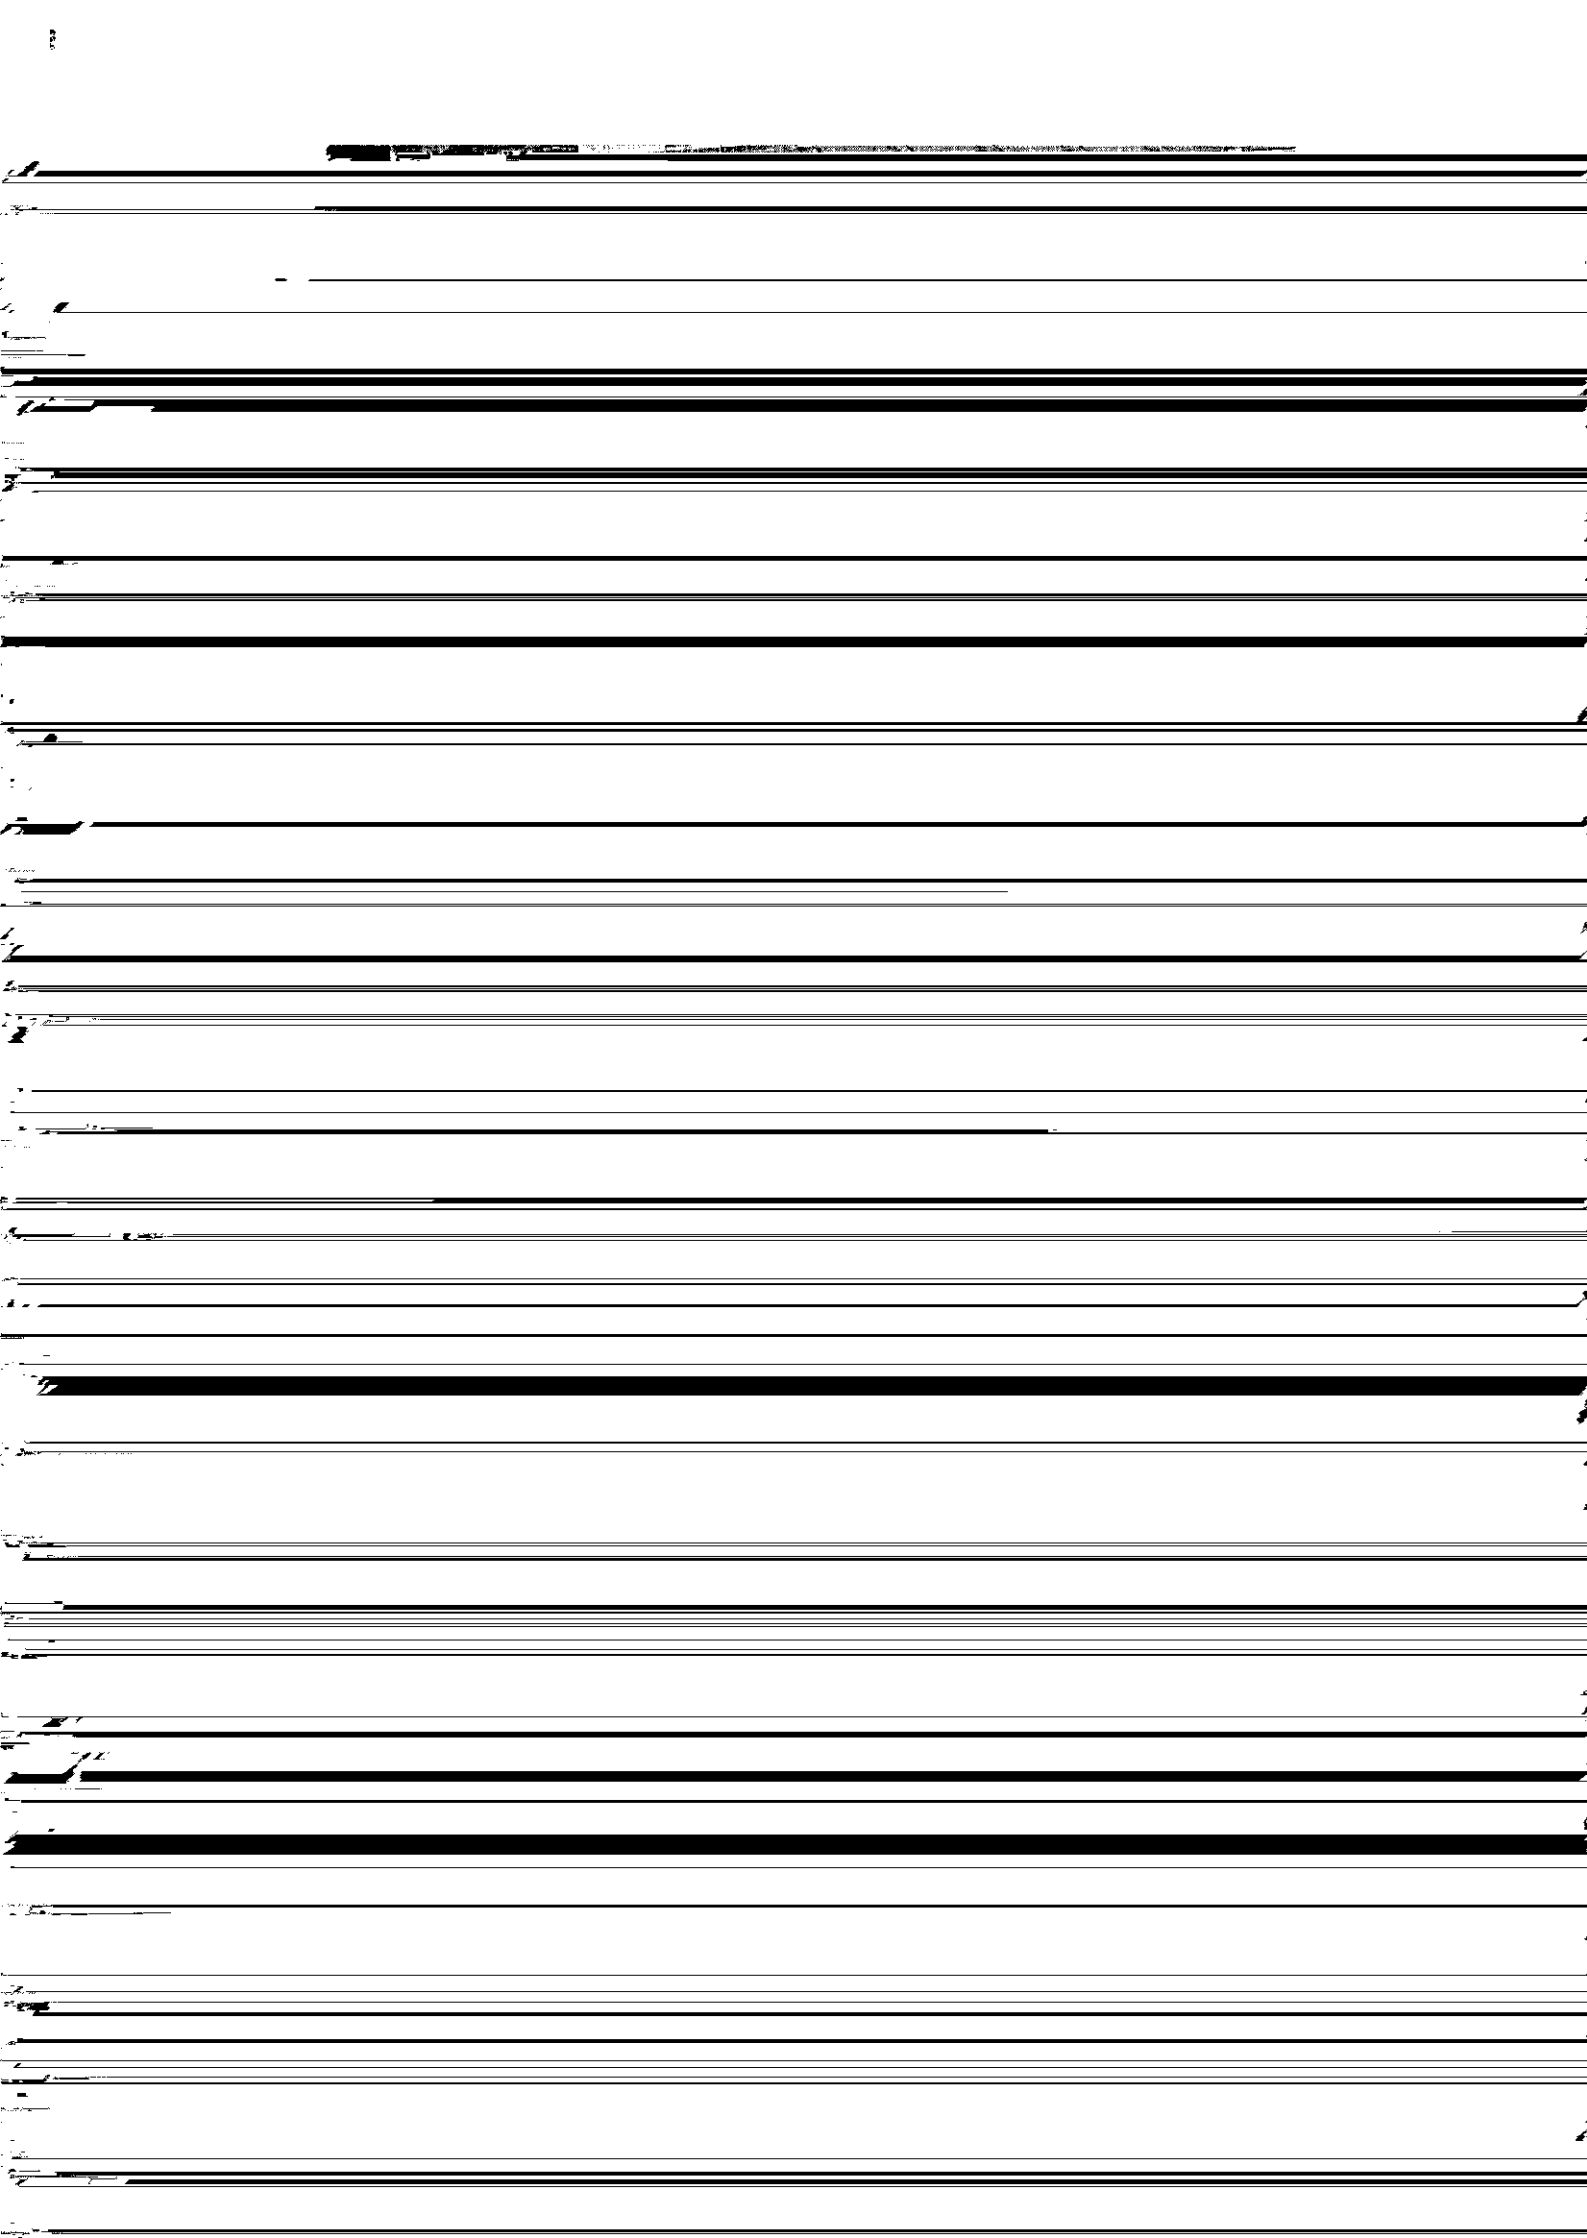

with its use can be solved as follows:

charging device

(1) The best resistance characteristic of a

(2) The best resistance characteristic of a

Filter (306 mm ϕ \times 10 mL \times 108 pcs/chamber)

large-capacity, and high-accuracy temperature control type to protect the filter and prevent excess cooling

900-400-150

177

15

