

Mesures for Increasing Hot Stove Heat Efficiency

(Shuichi Taniguchi)

(Akira Suemori)

(Hideo Kubo)

(Takanari Kawai)

:

80

87 88

熱風炉熱効率の向上策


Measures for Improving Hot Stove Heat Efficiency


谷口 修一*
Shuichi Taniguchi末森 晃**
Akira Suemori久保 秀穂***
Hideo Kubo河合 隆成****
Takanari Kawai

Synopsis:

Hot stove operation was improved and waste gas heat recovery equipment was installed to increase heat effi-


ciency. The heat efficiency was improved from the former level of 80% to 87.88%.

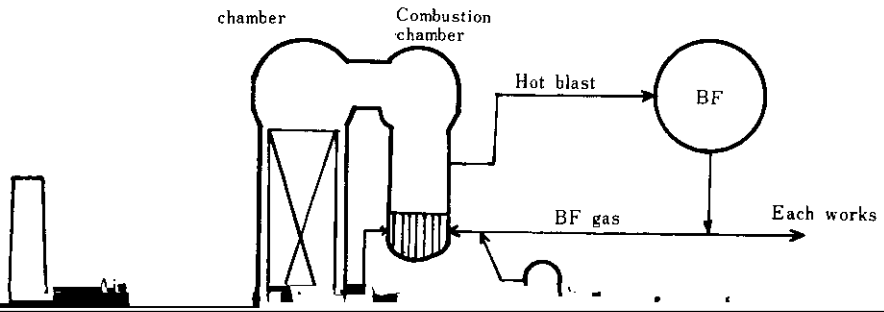

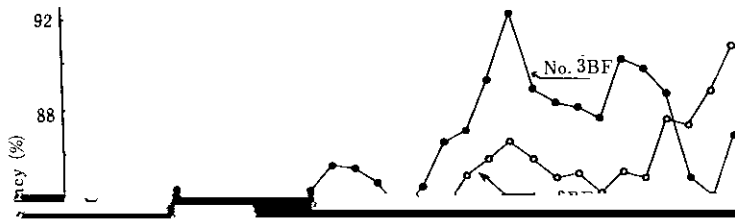

する。

Cガス富化率を上げ、投入熱量を大きくし、流速

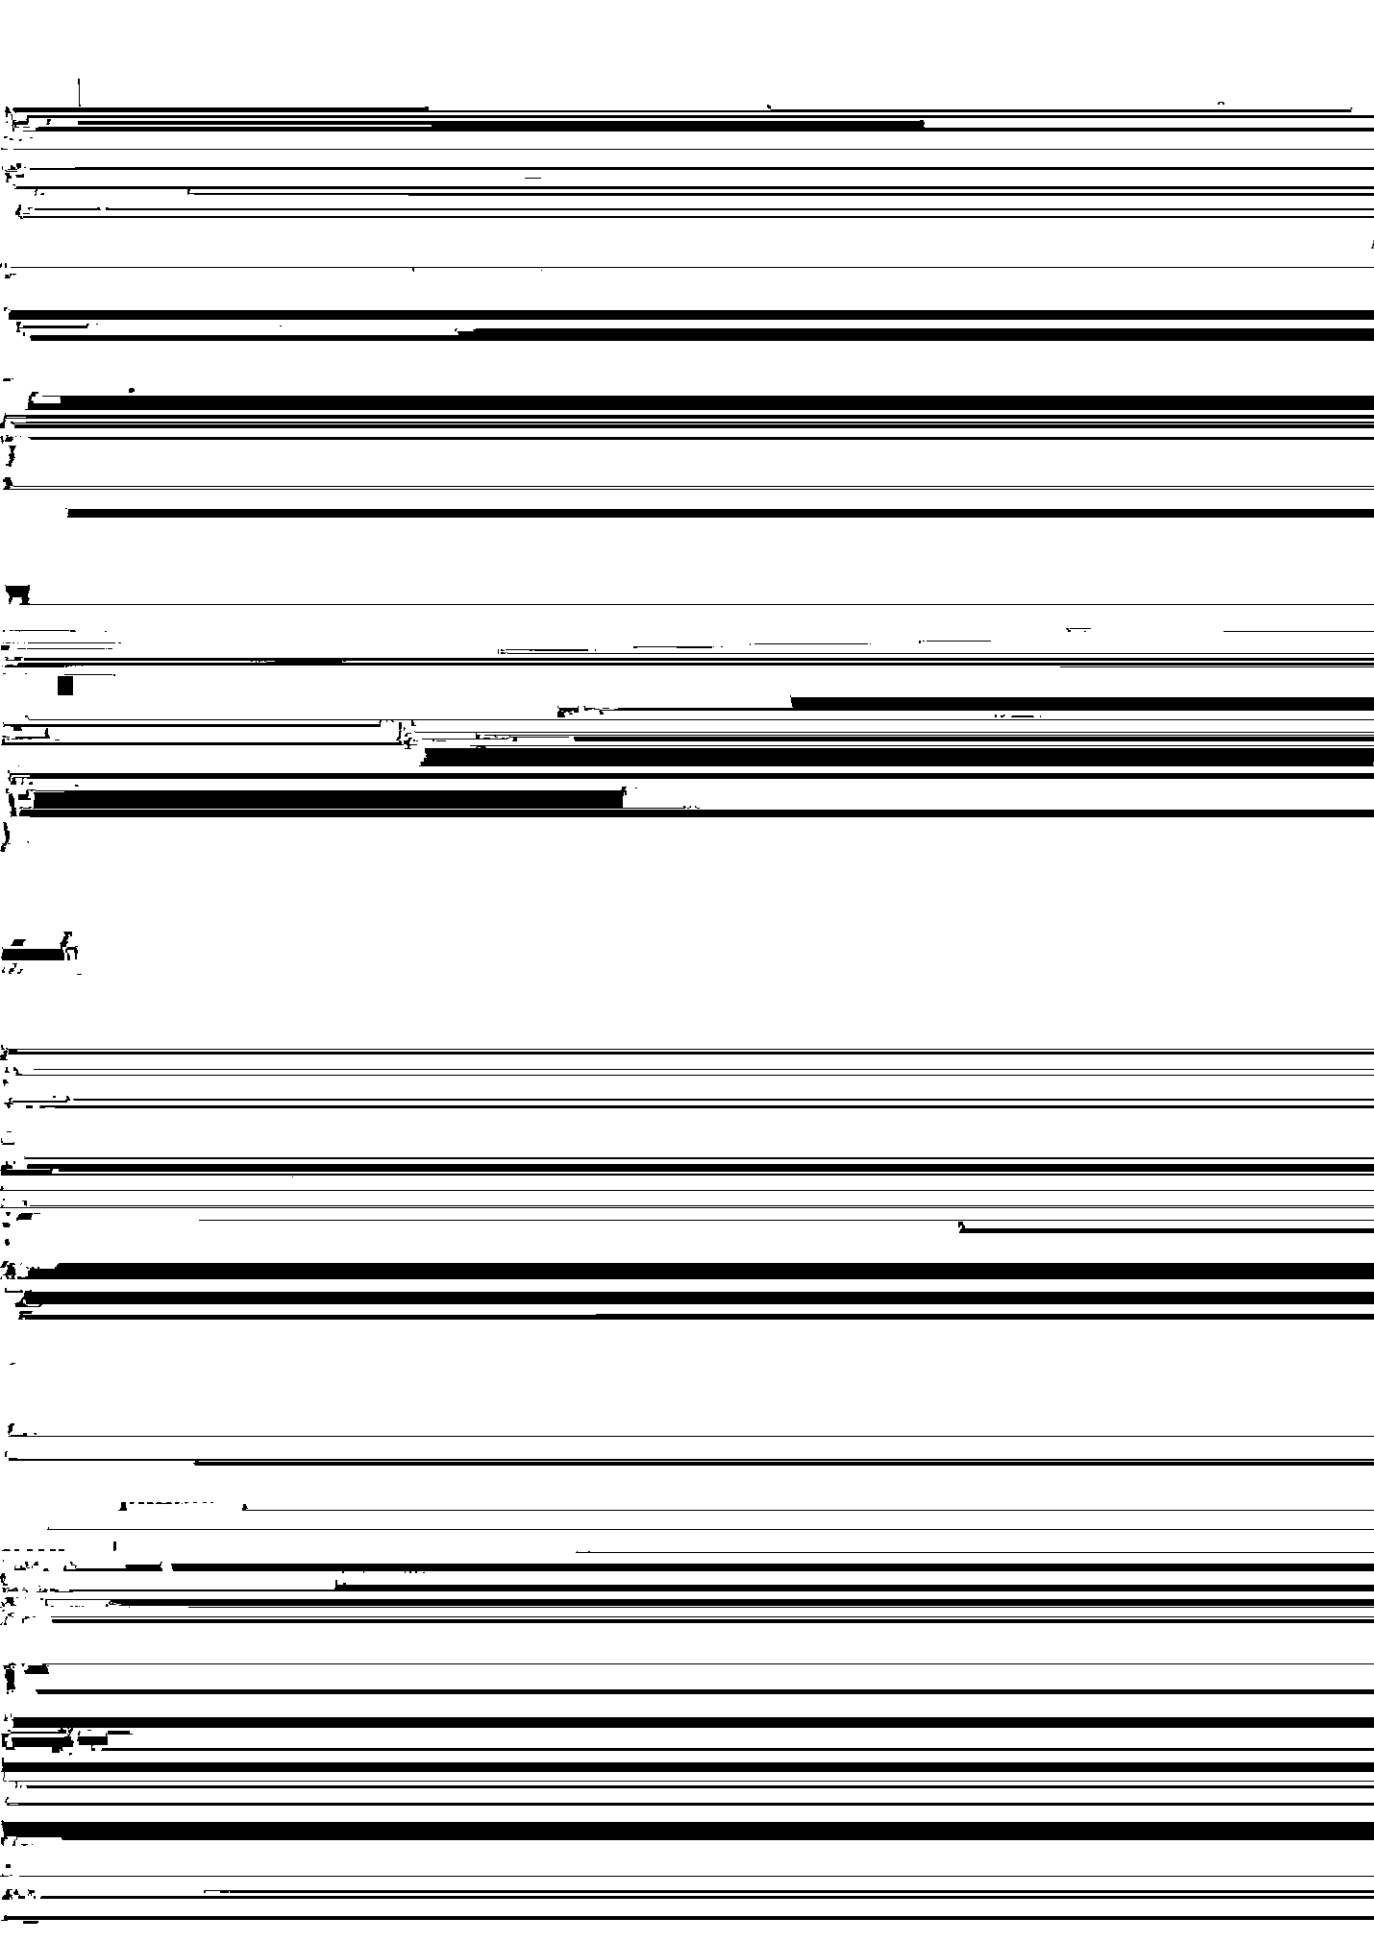


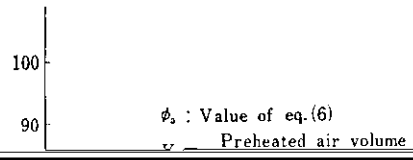


Table 3 Actual effect of calorific value of mixed gas on hot stove efficiency at No. 2BF (Mizushima)

Item	Case	1	2	3
------	------	---	---	---

Table 4 Specification and performance of hot stove air preheater

	Chiba No.5BF(3rd)	Chiba No.6BF(1st)	Mizushima No.2BF(3rd)	Mizushima No.3BF(2nd)	Mizushima No.4BF(2nd)
					During

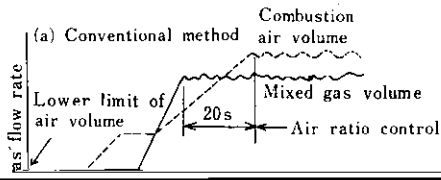